
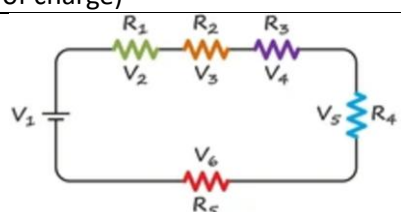
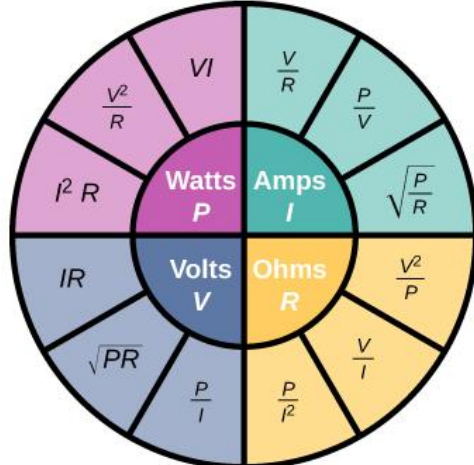


Harold's DC Circuits




Cheat Sheet








11 October 2025

Circuit Laws

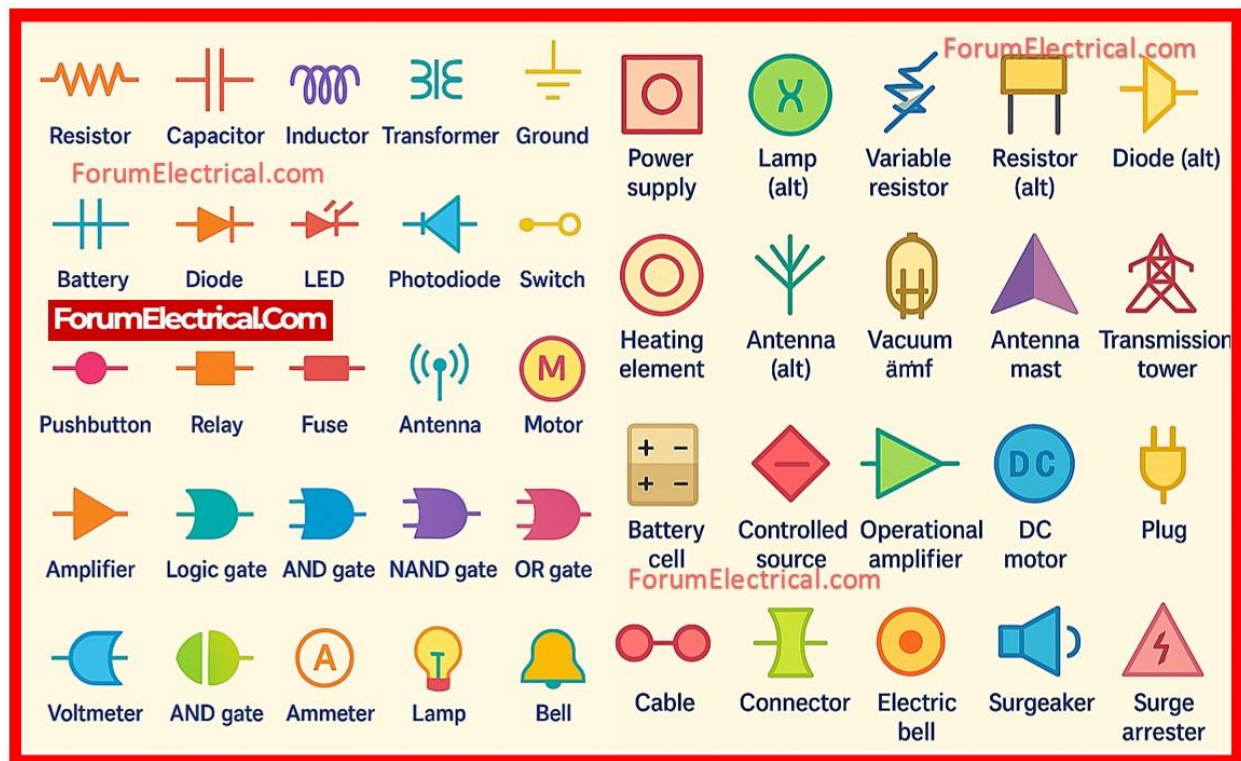
Circuit Law	Formula	
Kirchhoff's Current Law (KCL)	$\sum_{i=1}^n I_i = 0$ $I_{in1} + I_{in2} = I_{out1} + I_{out2} + I_{out3}$	
	The total current flowing into a node or junction must equal the total current flowing out of the node or junction. (conservation of charge)	
Kirchhoff's Voltage Law (KVL)	$\sum_{i=1}^n V_i = 0$ $V_1 = V_2 + V_3 + V_4 + V_5 + V_6$	
	The sum of all voltages around a circuit loop is equal to zero. (conservation of energy)	
Ohm's Law	$V = IR$	
Power	$P = VI$ $P = I^2R$ $P = \frac{V^2}{R}$ $P = \frac{W}{t}$	An across (V) times a through (I) variable. $\text{Watt (W)} = \frac{\text{Volt (V)}}{\text{Ampere (A)}}$
Electrical Energy	$E = QV$ $E = VIt$ $P = I^2Rt$ $E = Pt$	$\text{Joule (J)} = \frac{\text{Watt (W)}}{\text{second (s)}}$

Components

Element	Battery	Ground	Current Source
Component			
Symbol			
Denoted by	V	GND	I
Units	V (Volt)	0 V	A (Ampere)
Series	$V_{EQ} = V_1 + V_2$	NA	$I_{EQ} = I_1 + I_2$
Parallel	$V_1 = V_2 = V_3$	NA	$I_{EQ} = I_1 + I_2$

Element	Resistor	Capacitor	Inductor
Component			
Symbol			
Denoted by	R	C	L
Units	Ω (Ohm)	F (Farad)	H (Henry)
Equation	$R = \frac{V_R}{I}$	$C = \frac{Q}{V_C}$	$L = \frac{V_L}{\left(\frac{di}{dt}\right)}$
Series			
	$R_T = R_1 + R_2 + R_3$	$\frac{1}{C_T} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3}$	$L_T = L_1 + L_2 + L_3$
Parallel			
	$\frac{1}{R_T} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3}$	$C_T = C_1 + C_2 + C_3$	$\frac{1}{L_T} = \frac{1}{L_1} + \frac{1}{L_2} + \frac{1}{L_3}$

Electrical Symbols



Sources

- Electrical Technology (2020 Oct). Resistance, Capacitance & Inductance in Series-Parallel – Equation & Formulas. <https://www.electricaltechnology.org/2020/10/resistance-inductance-capacitance-series-parallel-formulas.html>
- ForumElectrical.Com (2025). Electrical Symbols. <https://forumelectrical.com/basic-electric-symbols/>
- LibreTexts Physics (2024). 9.6: Electrical Energy and Power. [https://phys.libretexts.org/Bookshelves/University_Physics/University_Physics_\(OpenStax\)/University_Physics_II_-_Thermodynamics_Electricity_and_Magnetism_\(OpenStax\)/09%3A_Current_and_Resistance/9.06%3A_Electrical_Energy_and_Power](https://phys.libretexts.org/Bookshelves/University_Physics/University_Physics_(OpenStax)/University_Physics_II_-_Thermodynamics_Electricity_and_Magnetism_(OpenStax)/09%3A_Current_and_Resistance/9.06%3A_Electrical_Energy_and_Power)
- Tech Web (2024). Resonant Circuits: Resonant Frequency and Q Factor. <https://techweb.rohm.com/product/power-device/si/18332/>